RECEIVED
JAN 11 2019
CITY OF
PLANNING D

EXTERIOR FINISHES

EXTERIOR INSULATED FINISH SYSTEM :	DRYVIT (SANDBEBBLE FINE) COLOR: EIFS 1 = #113 AMARILLO WHITE
BRICK WAINSCOT: (GRADE TO PRECAST SILL)	BELDEN – "MODULAR MIDLAND BLEND A"
BRICK FIELD (ABOVE WAINSCOT):	BELDEN – "MODULAR HAMILTON BLEND A"
BRICK SOLDIER COURSE:	BELDEN – "MODULAR HAMILTON BLEND A"
MORTAR:	BRIDMENT – "B-133 LIGHT BUFF"
MASONRY SEALER:	ALL BRICK SURFACES SHALL BE TREATED W/SEALER REFER TO SPECIFICATIONS.
STANDING SEAM AWNING:	FIRESTONE UNA-CLAD KYNAR 500 / KYLAR METAL 50000 FLUOROCARBON STEEL CHAMPAGNE METALLIC
ROOF SHINGLES:	OWENS CORNING DURATION SERIES "DRIFTWOOD"
GUTTER, DOWNSPOUTS, FASCIA & EXPOSED TRIM:	MASTIC HOME EXTERIORS BY PLY GEM – DESERT SAND
STOREFRONT SYSTEM:	2x4 1/2" KAWNEER TRIFAB VG 451T SERIES CLEAR ANODIZED ALUMINUM STOREFRONT SYSTEM W/1" INSULATED GLAZING.
DUMPSTER WALLS:	MATCH BUILDING
H.M. DOORS & FRAMES:	FIELD PAINT W/SHERWIN-WILLIAMS B66-310 PRO-CYRL PRIMER FOLLOWED BY (2) FINISH COATS OF B66-380 SHER-CYRL HPA. COLOR SHALL BE SW-7515 "HOMESTEAD BROWN". PROVIDE MOCK-UP AND VERIFY COLOR W/OWNER.
BOLLARDS/GUARD POSTS:	FIELD PAINT W/SHERWIN-WILLIAMS B66-310 PRO-CYRL PRIMER FOLLOWED BY (2) FINISH COATS OF B66-380 SHER-CYRL HPA. COLOR SHALL BE "VALVOLINE RED"
DUMPSTER ENCLOSURE GATE AND POSTS:	FIELD PAINT W/SHERWIN-WILLIAMS B66-310 PRO-CYRL PRIMER FOLLOWED BY (2) FINISH COATS OF SHERWIN WILLIAMS 7515 "HOMESTEAD BROWN". SEMI-GLOSS B1W ACRYLIC B66-290.
PARKING LOT STRIPING:	SHERWIN-WILLIAMS #DM226 SETFAST TM PAINT. COLOR SHALL BE "WHITE".
HANDICAP STALL STRIPING:	SHERWIN-WILLIAMS #DM2133 SETFAST TM PAINT. COLOR SHALL BE "ADA BLUE".

NOTE : ELEVATIONS ARE TYPICAL FOR ALL ELEVATIONS

1 LEFT ELEVATION
BRICK / BRICK

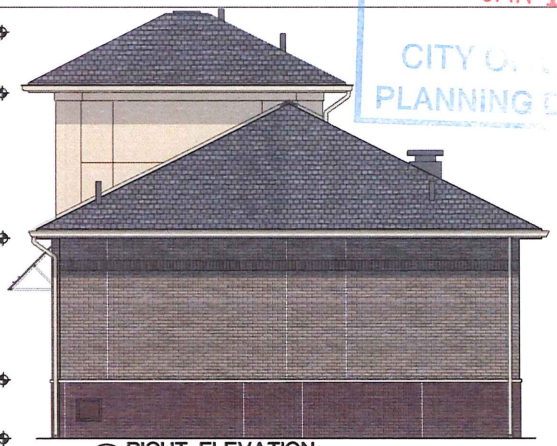

2 RIGHT ELEVATION
BRICK / BRICK

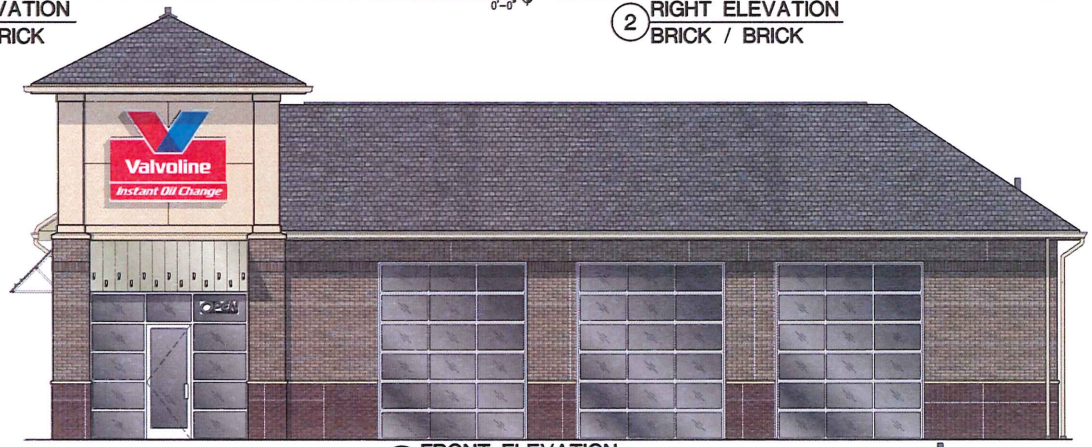

3 FRONT ELEVATION
BRICK / BRICK

4 REAR ELEVATION
BRICK / BRICK



5 DUMPSTER FRONT ELEVATION
BRICK / BRICK



6 DUMPSTER SIDE ELEVATION
BRICK / BRICK

CESO
WWW.CESOINC.COM
1244 HARMON ST. SUITE 210 DAYTON, OH 45410
PHONE (937) 435-9584 FAX (937) 435-3302

No.	Revision/Submissions	Date

VALVOLINE INSTANT OIL CHANGE
THREE BAY LEFT HAND PROTOTYPE DESIGN

© 2017 CESO, INC.

Project No.	753737.01
Scale	AS NOTED
Drawn	CESO
Checked	BWH
Date	06.23.17

Drawing Title
EXTERIOR ELEVATIONS

Drawing No.